

**ebm-papst St. Georgen GmbH & Co. KG**

Hermann-Papst-Straße 1

D-78112 St. Georgen

Phone +49 7724 81-0

Fax +49 7724 81-1309

info2@de.ebmpapst.com

www.ebmpapst.com

Nominal data


Type	ACI 4420 HH	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	195 .. 265
Frequency	Hz	50
Type of data definition		rfa
Speed	min ⁻¹	3350
Power input	W	4.4
Min. ambient temperature	°C	-20
Max. ambient temperature	°C	+75
Air flow	m ³ /h	180
Sound power level	B	5.3
Sound pressure level	dB(A)	42

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Technical features

General description	Particular design features: Energy-efficient AC voltage fan with EC technology. Converter electronics and fan electronics fully integrated. Significantly reduced power consumption compared to conventional AC voltage fans. Significantly quieter than existing AC voltage fans. Significantly longer service life than existing AC voltage fans. Fan speed not dependent on power frequency. General features: Material: fibreglass-reinforced plastic. Impeller PA, housing PBT. Electronic locked-rotor protection. Connection via flat plugs 2.8 x 0.5, optionally with strands that are brought out. Air exhaust over bars. Rotational direction clockwise looking at rotor. Mass: 250 g.
Mass	0.250 kg
Dimensions	119 x 119 x 38 mm
Material of impeller	Fibreglass-reinforced PA plastic
Housing material	Fibreglass-reinforced PBT plastic
Direction of air flow	Air exhaust over bars
Direction of rotation	Clockwise, looking at rotor
Bearing	Ball bearings
Lifetime L10 at 40 °C	62500 h
Lifetime L10 at maximum temperature	30000 h

Product drawing

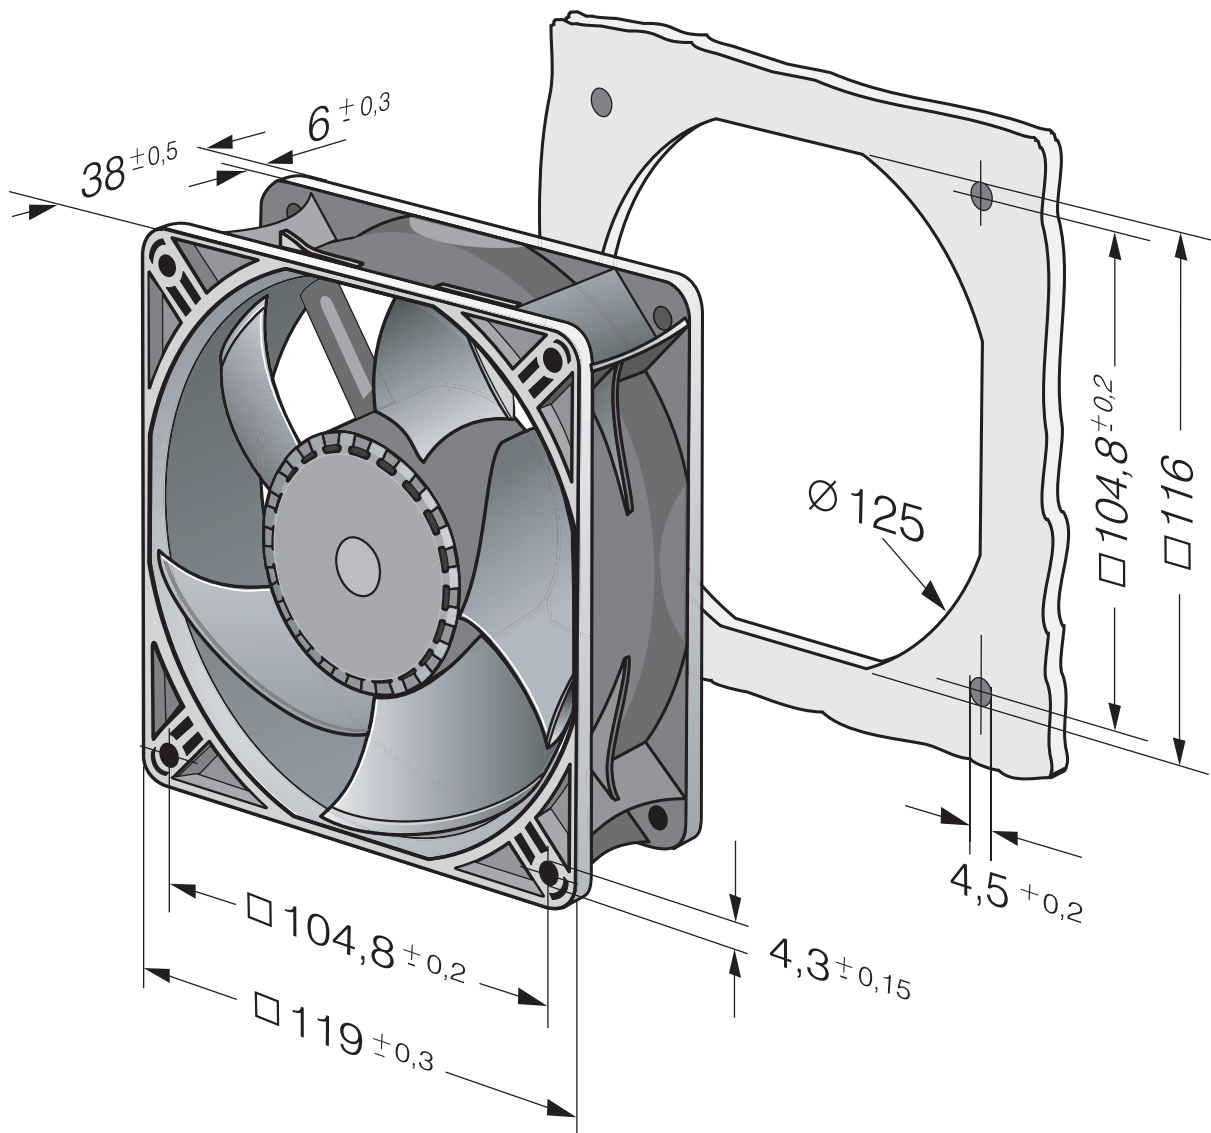

Charts

