


**"GF15KP BE" SERIES FAN FILTERS**

Description: **Fan Filter 115/230 Va.c.**





**Type of material:** ABS/PC alloy  
**Standard color:** RAL 7035 - other colors on request  
**Protection degree:** IP54, according to EN 60529 standard  
**Fixing system:** hook tightened by a screw (torque wrench setting 0.5 Nm)  
**Plate thickness:** up to 8 mm and up to 16 mm by cutting the jacks  
**Storage temperature:** from -40°C to +70°C  
**Lifetime L10 at 40°C:** 45,000 h  
**Motor protection:** impedance  
**Electrical connection:** by terminal block 2 poles L-N  
**Earth connection:** (by M4 screw on fan's casing)  
**Appliance class:** class I  
**Type of filter media:** thermo-linked progressive structure synthetic fibre  
**Filtering class:** class G3, according to EN 779  
**Degree of separation:** 85% - DIN 24185  
**Dust retention capacity:** 600 g/m<sup>2</sup>  
**Note:** filter media is washable for about 10 times  
**Weight:** 1.4 Kg  
**Approvals:** CE

**technical drawing**

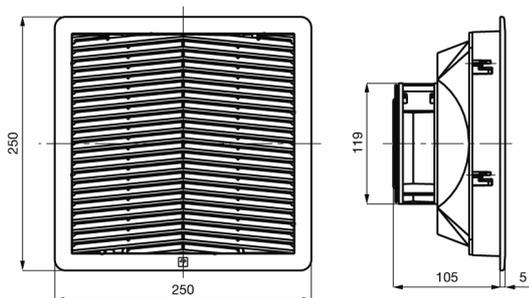

**mounting cut-out**

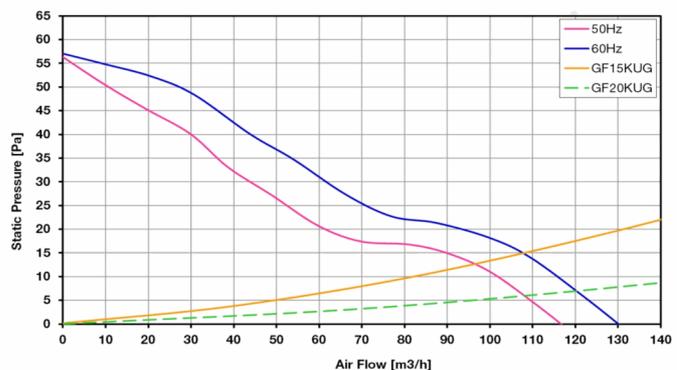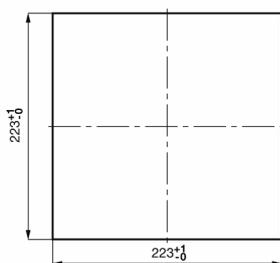

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m <sup>3</sup> /h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
GF15KPU230BE	230 V a.c.	50/60	0.10/0.10	18/18	118/132	56/57	43.0/48.0	-10 + +55	CE

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.