


"T19" SERIES

Description: **Roof Exhaust Unit**





Type of material:	epoxy painted steel casing
Standard colour:	RAL 7032 and RAL 7035
Protection degree:	IP23, according to EN 60529 standard
Fixing method:	By No 4 M6 screws
Plate thickness:	any
Storage temperature:	from -20°C to +60°C
Lifetime L10 at 40°C:	50,000 h
Motor protection:	thermal
Electrical connection:	by 3 core 1.0 mm ² cable
Earth connection:	by yellow/green conductor
Appliance class:	class I
Weight:	5.29 Kg
Approvals:	CE

technical drawing

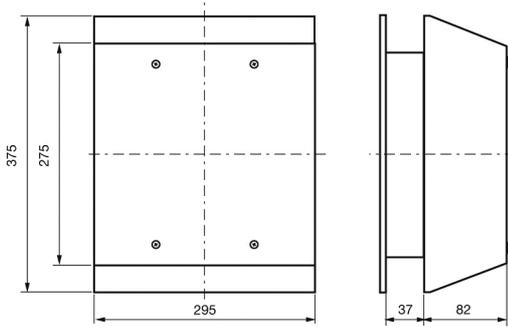

mounting cut-out

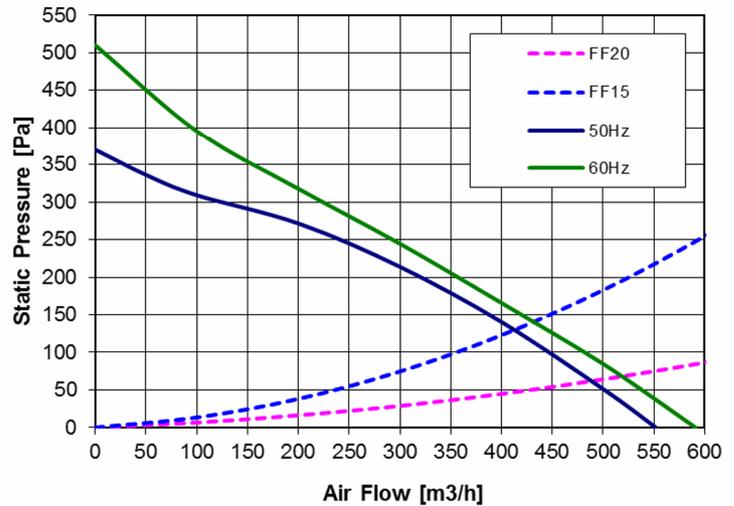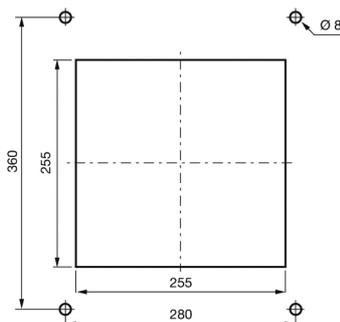

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m3/h)	Static Pressure (Pa)	Noise [db(A)]	Rated Temp. Range (°C)	Approvals
T19*115B	115 V a.c.	50/60	0.53/0.62	58/71	550/590	370/510	67.9/71.0	-20 ÷ +60	CE
T19*230B	230 V a.c.	50/60	0.290/0.340	62/78	550/590	370/510	67.9/71.0	-20 ÷ +60	CE

(*) may be R for color RAL 7032 or U for color RAL 7035

(**) data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.